




LED EMERGENCY LIGHT

LCDJ-F0032

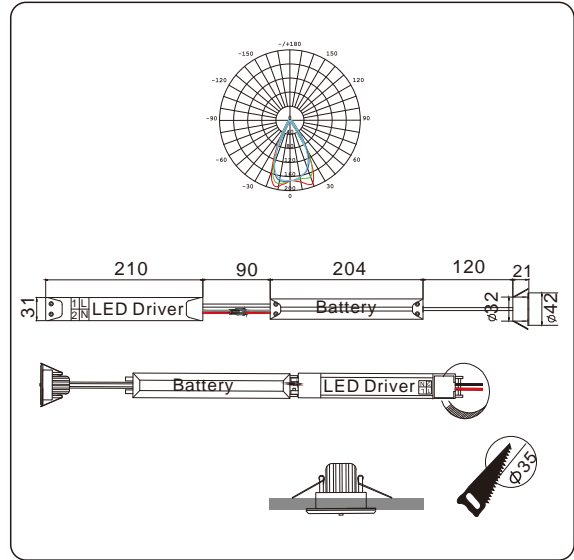

SPECIFICATION/DESCRIPTION:

LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function

WORKING VOLTAGE:220-240VAC 50-60Hz

INSTALLATION :Recessed mounting

LENS: 120 degrees beam angle

OUTPUT VOLTAGE:3V

DISCHARGE CURRENT:500mA

OUTPUT MODE: Constant power

EMERGENCY POWER:2.4W

LED CCT:6000K

AMBIENT TEMPERATURE TA: 0...45°C

WARRANTY:3Years

AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED

STANDARD

EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, IEC 62034,IEC 62386

DALI-2 protocol: 101 102 202 104 251 252 253 254

DALI-2 ID No: 6292 (LC-ND001)

Certificate:CE,EMC

LCDJ-F0032 Series

Besteil-Nr	TypeNo	Power	Battery	LM	Function	Packing LxWxH	Qty Pcs	Weight Kg
30100051	LCDJ-F0032	3W	4.8V2.0Ah Ni-Cad	180	ON	490X290X250	20	9.5
30100050	LCDJ-F0032	3W	4.8V2.0Ah Ni-Cad	180	Autotest	490X290X250	20	9.5
31100050	LCDJ-F0032	3W	6.4V1.5Ah LiFePO4	230	DALI-2/ST	490X290X250	20	9.5
32103050	LCDJ-F0032	3W	6.4V1.5Ah LiFePO4	230	DALI-2/ST	490X290X250	20	9.5