



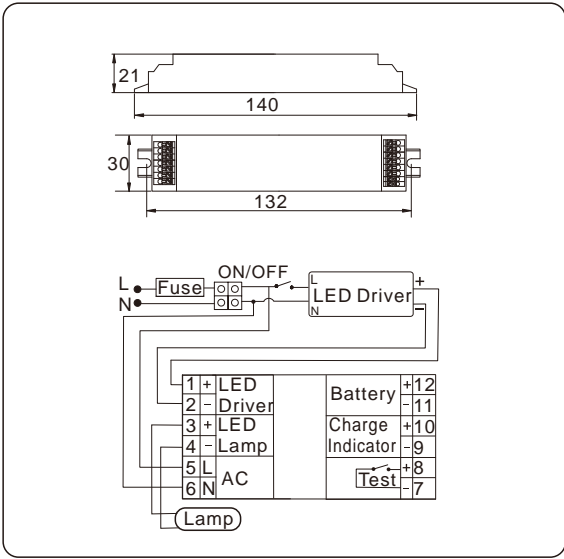

# LED EMERGENCY KITS

**LC-A0105LED**

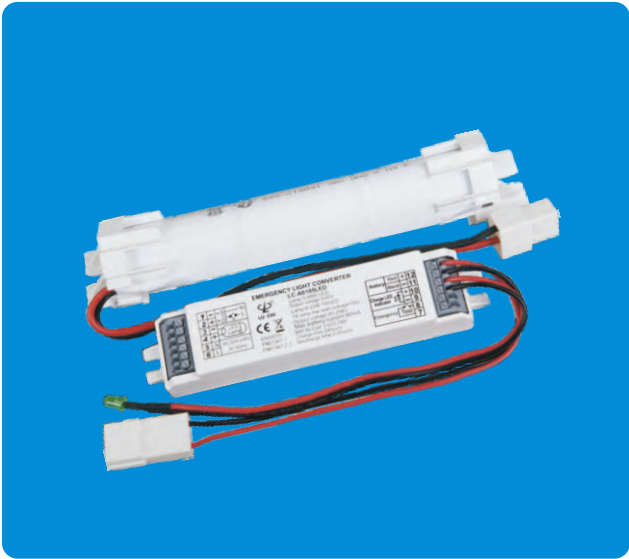

<b>SPECIFICATION/DESCRIPTION:</b> LED Emergency Converter: non-maintained working mode, suitable for different lights with external driver, provide battery charge and discharge.	
<b>APPLICATION RANGE :</b> downlight, tri-proof light, ceiling light, panel light...etc.	
<b>WORKING VOLTAGE:</b> 220-240VAC 50-60Hz	<b>OUTPUT VOLTAGE:</b> 12-200V
<b>DISCHARGE CURRENT:</b> 500-1200mA	<b>OUTPUT MODE:</b> inverter mode
<b>AMBIENT TEMPERATURE TA:</b> 0...45℃	<b>WARRANTY:</b> 3Years
<b>PROTECTION FUNCTION:</b> Deep discharge protection Short -circuit- proof battery connection Open-circuit -proof Polarity reversal protection for battery Fault indication	
<b>STANDARD</b> EN 60598-1, EN 60598-2-22, EN60598-2-1, EN61347-1, EN61347-2-7, EN61347-2-13, EN62031, EN62471, EN61000-3-2, EN61000-3-3, EN55015, EN61547, IEC TR62778, <b>Certificate:</b> CE, EMC	

**LC-A0105LED Series**

TypeNo	Input	DC Output	Battery	Power	Duration	Qty	Weight	Packing
20000070	220-240V	12-200V	Ni-Cad 3.6V2.0AH	4W	1.5H	25pcs	8Kgs	36X21X19CM
20000071	220-240V	12-200V	Ni-Cad 3.6V2.0AH	2W	3.0H	25pcs	8Kgs	36X21X19CM
20000072	220-240V	12-200V	Ni-Cad 3.6V3.0AH	6W	1.5H	25pcs	8Kgs	36X21X19CM
20000073	220-240V	12-200V	Ni-Cad 3.6V3.0AH	3W	3.0H	25pcs	8Kgs	36X21X19CM