


LCDJ-SC0032

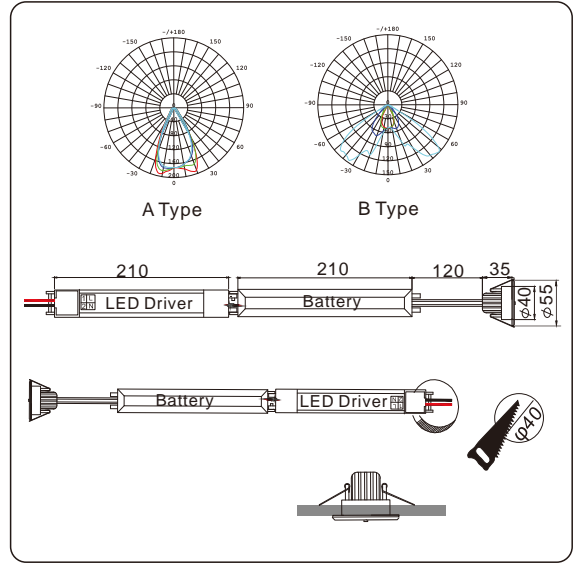

**SPECIFICATION/DESCRIPTION:**

LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function

**WORKING VOLTAGE:**220-240VAC 50-60Hz

**INSTALLATION :**Recessed mounting

**LENS:** A/B two type lens can be replaced

**OUTPUT VOLTAGE:**3V

**DISCHARGE CURRENT:**560mA

**OUTPUT MODE:** Constant current

**EMERGENCY POWER:**2W

**LED CCT:**6000K

**AMBIENT TEMPERATURE TA:** 0...45°C

**WARRANTY:**3Years

**AUTO TEST FEATURES**

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED

**STANDARD**

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, IEC 62034, IEC 62386

DALI-2 protocol: 101 102 202 104 251 252 253 254

DALI-2 No:6292 (LC-ND001)

Certificate:CB,CE,EMC

**LCDJ-SC0032 Series**

Besteil-Nr	Type	Power	Battery	ELT LM	Function	Packing	Qty	Weight
31500040	LCDJ-SC0032-A	3W	3.6V2.0Ah Ni-Mh	180	Autotest	490X290X250	20Pcs	9.5Kg
31500041	LCDJ-SC0032-B	3W	3.6V2.0Ah Ni-Mh	160	Autotest	490X290X250	20Pcs	9.5Kg
32500040	LCDJ-SC0032-AD	3W	3.6V2.0Ah Ni-Mh	180	DALI-2	490X290X250	20Pcs	9.5Kg
32500041	LCDJ-SC0032-BD	3W	3.6V2.0Ah Ni-Mh	160	DALI-2	490X290X250	20Pcs	9.5Kg
32500042	LCDJ-SC0032-AD	3W	6.4V1.5Ah LiFePO4	200	DALI-2	490X290X250	20Pcs	9.5Kg
32500043	LCDJ-SC0032-BD	3W	6.4V1.5Ah LiFePO4	180	DALI-2	490X290X250	20Pcs	9.5Kg