




# LED EMERGENCY LIGHT

**LCDJ-SC0037**

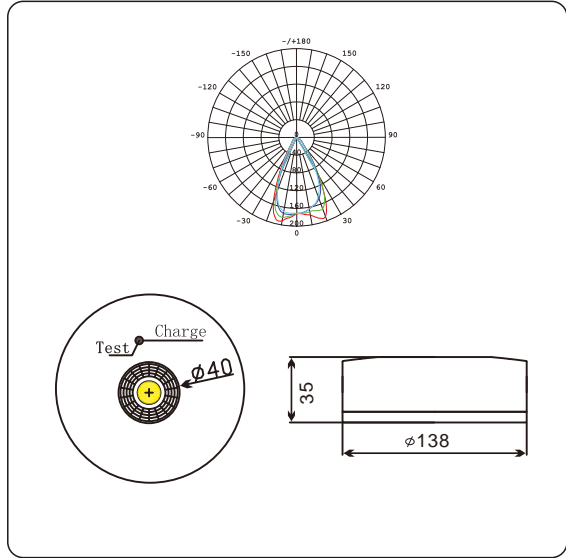

<b>SPECIFICATION/DESCRIPTION:</b> LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function								
<b>WORKING VOLTAGE:</b> 220-240VAC 50-60Hz	<b>INSTALLATION :</b> Surface mounting							
<b>LENS:</b> Spot light	<b>OUTPUT VOLTAGE:</b> 3V							
<b>DISCHARGE CURRENT:</b> 400/550mA	<b>OUTPUT MODE:</b> Constant power							
<b>EMERGENCY POWER:</b> 2.0/2.5W	<b>LED CCT:</b> 6000K							
<b>AMBIENT TEMPERATURE TA:</b> 0...45°C	<b>WARRANTY:</b> 3Years							
<b>AUTO TEST FEATURES</b> Performs 20 second functional test every 30days Rated duration test every 52 weeks in accordance with EN 50172:2004 The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date. Indication through a bi-colour LED								
<b>STANDARD</b> EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, IEC 62034, IEC 62386 DALI-2 protocol: <a href="#">101</a> <a href="#">102</a> <a href="#">202</a> 104 251 252 253 254 DALI-2 No:6292 (LC-ND001) Certificate:CB,CE,EMC								
<b>LCDJ-SC0037 Series</b>								
Besteil-Nr	Type No	Power	Battery	Emergency LM	Function	Packing LxWxH	Qty Pcs	Weight Kg
31503110	LCDJ-SC0037	3W	6.4V1.5Ah LiFePO4	300	Autotest	300X300X280	20	8.5
32503110	LCDJ-SC0037-D	3W	6.4V1.5Ah LiFePO4	300	DALI-2	300X300X280	20	8.5
31503111	LCDJ-SC0037	3W	3.6V2.0Ah Ni-Mh	180	Autotest	300X300X280	20	8.5
31503112	LCDJ-SC0037-D	3W	3.6V2.0Ah Ni-Mh	180	DALI-2	300X300X280	20	8.5