




LED EMERGENCY LIGHT

LCDJ-SE0032

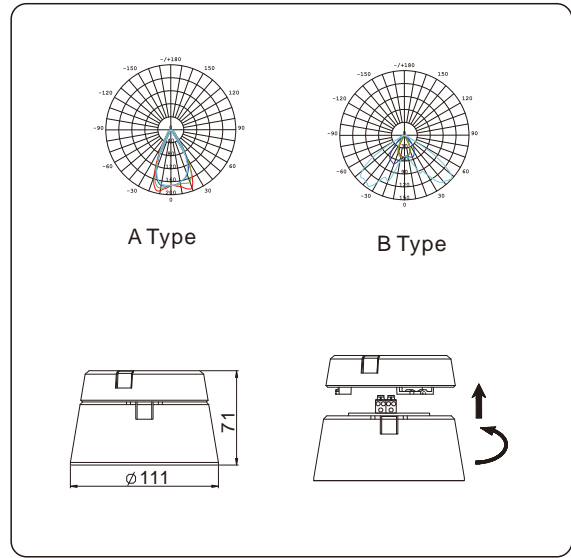

SPECIFICATION/DESCRIPTION: LED Emergency Light : non-maintained working mode, provide battery charge and discharge , with DALI-2 function or individual auto-test function								
WORKING VOLTAGE: 220-240VAC 50-60Hz	INSTALLATION : Surface mounting							
LENS: A/B two type lens can be replaced	OUTPUT VOLTAGE: 3V							
DISCHARGE CURRENT: 550mA	OUTPUT MODE: Constant power							
EMERGENCY POWER: 2W	LED CCT: 6000K							
AMBIENT TEMPERATURE TA: 0...45°C	WARRANTY: 3Years							
AUTO TEST FEATURES Performs 20 second functional test every 30days Rated duration test every 52 weeks in accordance with EN 50172:2004 The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date. Indication through a bi-colour LED								
STANDARD EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, IEC 62034, IEC 62386 DALI-2 protocol: 101 102 202 104 251 252 253 254 DALI-2 No:6292 (LC-ND001) Certificates:CB,CE,EMC								
LCDJ-SE0032								
Besteil-Nr	Type No	Power	Battery	Emergency LM	Function	Packing LxWxH	Qty Pcs	Weight Kg
31501060	LCDJ-SE0032-A	3W	3.6V2.0Ah Ni-Mh	180	Autotest	430x240x240	20	9.0
31501061	LCDJ-SE0032-B	3W	3.6V2.0Ah Ni-Mh	180	Autotest	430x240x240	20	9.0
32501060	LCDJ-SE0032-AD	3W	3.6V2.0Ah Ni-Mh	180	DALI-2	430x240x240	20	9.0
32501061	LCDJ-SE0032-BD	3W	3.6V2.0Ah Ni-Mh	180	DALI-2	430x240x240	20	9.0