



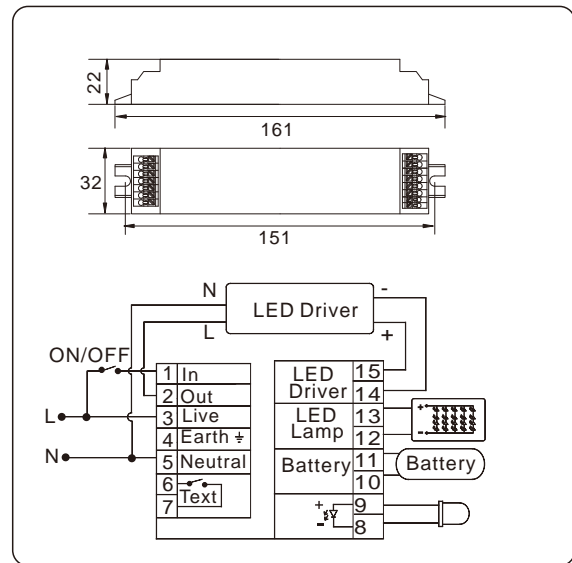

LED EMERGENCY KITS

LC-A3648LED

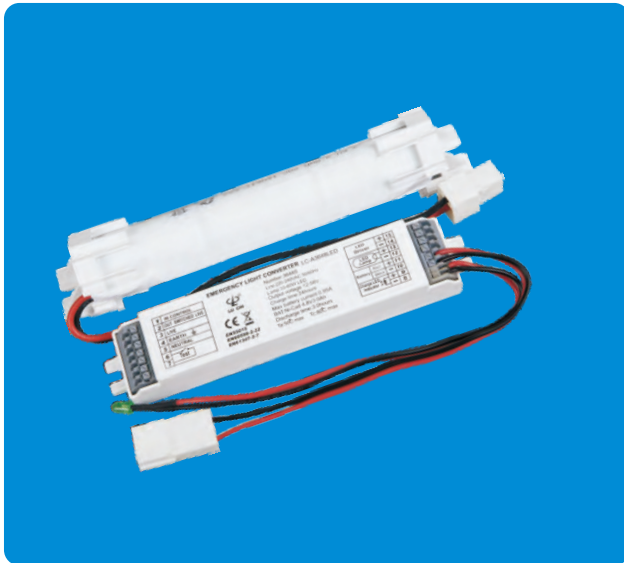

SPECIFICATION/DESCRIPTION: LED Emergency Converter: non-maintained working mode, suitable for different lights with external driver, provide battery charge and discharge.	
APPLICATION RANGE : downlight, tri-proof light, ceiling light, panel light...etc.	
WORKING VOLTAGE: 220-240VAC 50-60Hz	OUTPUT VOLTAGE: 12V1-5LEDs driver
DISCHARGE CURRENT: 600-1200mA	OUTPUT MODE: Constant power output
AMBIENT TEMPERATURE TA: 0...45°C	WARRANTY: 3Years
PROTECTION FUNCTION: Deep discharge protection Short -circuit- proof battery connection Open-circuit -proof Polarity reversal protection for battery Fault indication	
STANDARD EN 60598-1, EN 60598-2-22, EN60598-2-1, EN61347-1, EN61347-2-7, EN61347-2-13, EN62031, EN62471, EN61000-3-2, EN61000-3-3, EN55015, EN61547, IEC TR62778, Certificate: CE, EMC	

LC-A3648LED Series

Type No	Input	DC Output	Battery	Power	Duration	Qty	Weight	Packing
20000050	220-240V	12-60V	Ni-Cad 3.6V2.0Ah	4.0W	1.5H	50pcs	14Kgs	40X36X17CM
20000051	220-240V	12-60V	Ni-Cad 3.6V2.0Ah	2.0W	3.0H	50pcs	14Kgs	40X36X17CM
20000052	220-240V	12-60V	Ni-Cad 3.6V3.0Ah	6.0W	1.5H	50pcs	17Kgs	40X36X17CM
20000053	220-240V	12-60V	Ni-Cad 3.6V3.0Ah	3.0W	3.0H	50pcs	17Kgs	40X36X17CM
20000054	220-240V	12-60V	Ni-Cad 4.8V1.8AH	5.0W	1.5H	50pcs	17Kgs	40X36X17CM
20000055	220-240V	12-60V	Ni-Cad 4.8V1.8AH	2.5W	3.0H	50pcs	17Kgs	40X36X17CM