



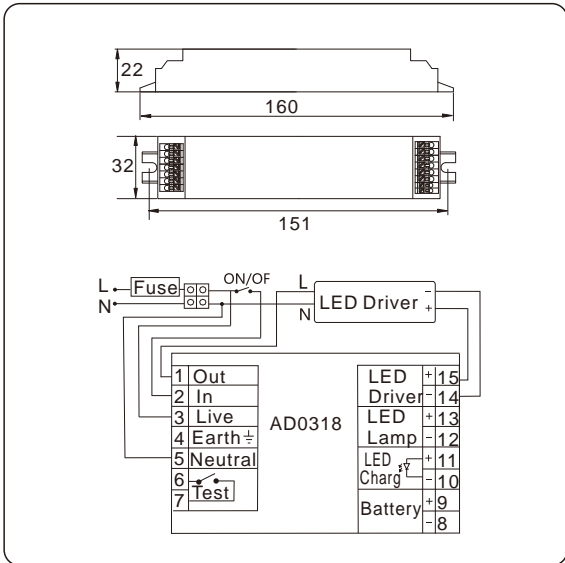

LED EMERGENCY KITS

LC-AD0318LED

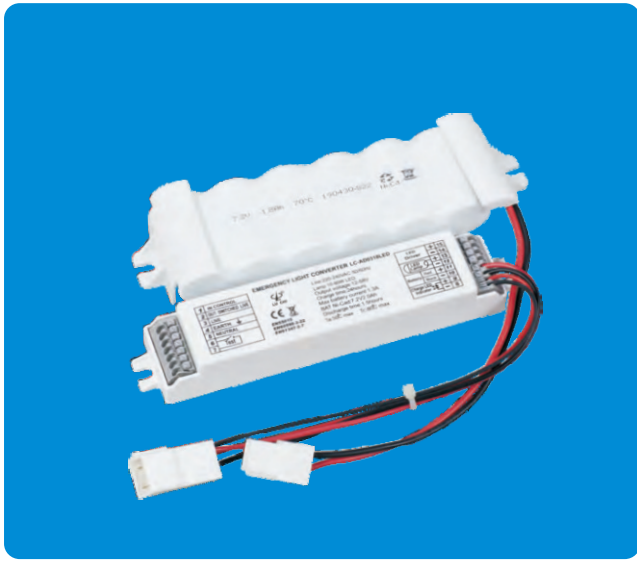

SPECIFICATION/DESCRIPTION: LED Emergency Converter: non-maintained working mode, suitable for different lights with external driver, provide battery charge and discharge.								
APPLICATION RANGE : downlight, tri-proof light, ceiling light, panel light...etc.								
WORKING VOLTAGE: 220-240VAC 50-60Hz	OUTPUT VOLTAGE: 12V1-5LEDs							
DISCHARGE CURRENT: 500-1000mA	OUTPUT MODE: Constant power output							
AMBIENT TEMPERATURE TA: 0...45°C	WARRANTY: 3Years							
PROTECTION FUNCTION: Deep discharge protection Short-circuit-proof battery connection Open-circuit-proof Polarity reversal protection for battery Fault indication								
STANDARD EN 60598-1, EN 60598-2-22, EN60598-2-1, EN61347-1, EN61347-2-7, EN61347-2-13, EN62031, EN62471, EN61000-3-2, EN61000-3-3, EN55015, EN61547, IEC TR62778, Certificate: CE, EMC								
LC-AD0318LED Series								
Type No	Input	Output	Battery	Power	Duration	Packing	Qty	Weight
20000040	220-240V	12-60V	Ni-Cad 6.0V1.8AH	6.0W	1.5H	42X24X17CM	25pcs	10Kgs
20000041	220-240V	12-60V	Ni-Cad 6.0V1.8AH	3.0W	3.0H	42X24X17CM	25pcs	10Kgs
20000042	220-240V	12-60V	Ni-Cad 6.0V3.0AH	5.0W	3.0H	42X24X17CM	25pcs	13Kgs
20000043	220-240V	12-60V	Ni-Cad 6.0V3.0AH	3.0W	3.0H	42X24X17CM	25pcs	13Kgs
20000044	220-240V	12-60V	Ni-Cad 7.2V1.8AH	8.0W	1.5H	42X24X17CM	25pcs	12Kgs
20000045	220-240V	12-60V	Ni-Cad 7.2V1.8AH	4.0W	3.0H	42X24X17CM	25pcs	12Kgs