



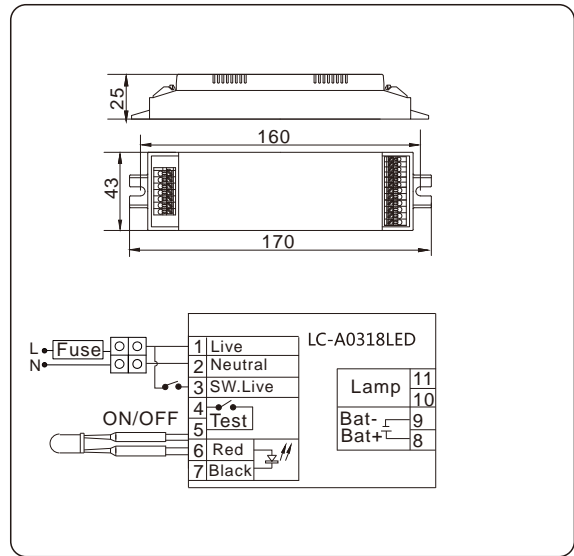

# LED EMERGENCY KITS

**LC-FA0318LED**

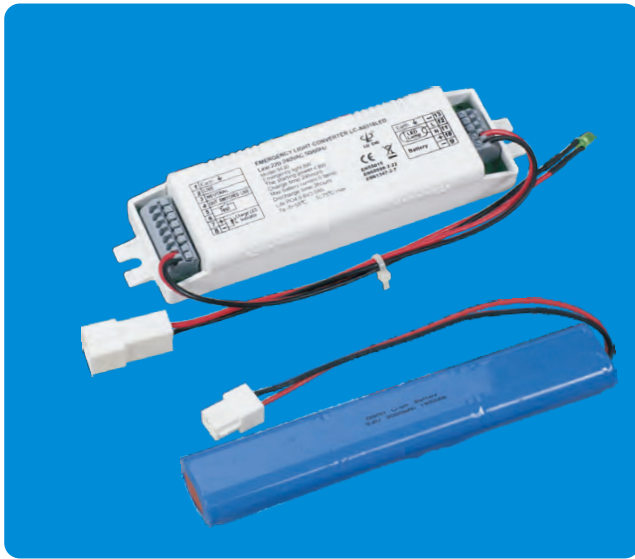

**SPECIFICATION/DESCRIPTION:**

LED Emergency Converter: non-maintained working mode, suitable for different lights with internal driver, provide battery charge and discharge.

**APPLICATION RANGE :** suitable for LED lamp bulb UG,MR16,E27,LED lamp tube,T8,T5 lamp tube

**WORKING VOLTAGE:**220-240VAC 50-60Hz

**OUTPUT VOLTAGE:**60-200V

**EMERGENCY POWER:**3-9W

**OUTPUT MODE:**100% full power (inverter mode)

**AMBIENT TEMPERATURE TA:** 0...45°C

**WARRANTY:**3Years

**THE FORMS OF LAMPS:**



**STANDARD**

EN 60598-1,EN 60598-2-22,EN60598-2-1,EN61347-1,EN61347-2-7,EN61347-2-13,EN62031,EN62471, EN61000-3-2,EN61000-3-3,EN55015,EN61547,IEC TR62778,

**Certificate:**CE,EMC

**LC-AF0318LED Series**

Type No	Input	Lamp	Battery	Power	Duration	Qty	Weight	Packing
21203020	220-240V	UG/MR/E27/T8	LiFePO4 6.4V/3.0Ah	3-5W	3.0H	50pcs	16Kgs	51X39X17CM
21203021	220-240V	UG/MR/E27/T8	LiFePO4 9.6V/3.0Ah	7-9W	3.0H	25pcs	10Kgs	42X22X17CM
21203022	220-240V	UG/MR/E27/T8	LiFePO4 6.4V/1.5Ah	3-5W	1.5H	50pcs	12Kgs	51X39X17CM
21203023	220-240V	UG/MR/E27/T8	LiFePO4 6.4V/3.0Ah	7-9W	1.5H	50pcs	16Kgs	51X39X17CM