


LCDJ-SI0037

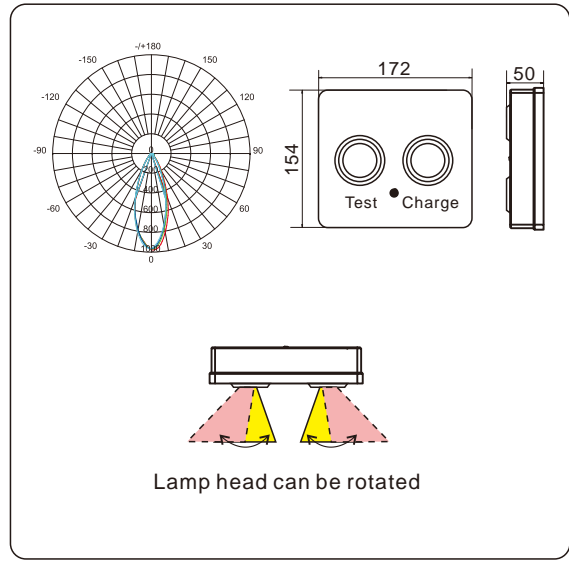

| SPECIFICATION/DESCRIPTION: LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function | | | | | | | | |
|--|--|-------|-------------------|-----|----------|------------------|------------|--------------|
| WORKING VOLTAGE: 220-240VAC 50-60Hz | INSTALLATION : Surface mounting | | | | | | | |
| LENS: Spot light, lamp head can be rotated | OUTPUT VOLTAGE: 12V | | | | | | | |
| DISCHARGE CURRENT: 850mA | OUTPUT MODE: Constant power | | | | | | | |
| EMERGENCY POWER: 5W | LED CCT: 6000K | | | | | | | |
| AMBIENT TEMPERATURE TA: 0...45°C | WARRANTY: 3Years | | | | | | | |
| AUTO TEST FEATURES Performs 20 second functional test every 30days Rated duration test every 52 weeks in accordance with EN 50172:2004 The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date. Indication through a bi-colour LED | | | | | | | | |
| STANDARD EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, IEC 62034,IEC 62386 DALI-2 protocol: 101 102 202 104 251 252 253 254 DALI-2 No:6292 (LC-ND001) Certificate:CB,CE,EMC | | | | | | | | |
| LCDJ-SI0037 Series | | | | | | | | |
| Besteil-Nr | Type No | Power | Battery | LM | Function | Packing LxWxH | Qty Pcs | Weight Kg |
| 31503150 | LCDJ-SI0037-A | 2X3W | 6.4V3.0Ah LiFePO4 | 480 | Autotest | 340X330X300 | 20 | 8.5 |
| 31503151 | LCDJ-SI0037-AD | 2X3W | 6.4V3.0Ah LiFePO4 | 480 | DALI-2 | 340X330X300 | 20 | 8.5 |