




LED EMERGENCY LIGHT

LCDJ-SL0048

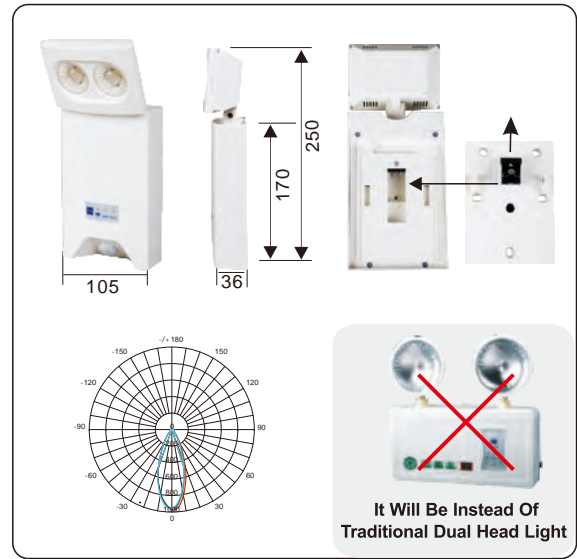

SPECIFICATION/DESCRIPTION:

LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with auto-test function and sensing function

WORKING VOLTAGE:220-240VAC 50-60Hz

INSTALLATION :Surface mounting

LENS: 36° lens,the angle of lamp head can be adjusted

OUTPUT VOLTAGE:12V

DISCHARGE CURRENT:850mA

OUTPUT MODE: Constant power

EMERGENCY POWER:5.5W

LED CCT:6000K

AMBIENT TEMPERATURE TA: 0...45°C

WARRANTY:3Years

AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED

STANDARD

EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, IEC 62034,

Certificate:CE,EMC

LCDJ-SL0048

Besteil-Nr	Type No	Power	Battery	LM	Sensor	Function	Packing LxWxH	Qty Pcs	Weight Kg
31303170	LCDJ-SL0048	2X3W	6.4V3.0Ah LiFePO4	460	No	Autotest	300X260X250	10	7
31303171	LCDJ-SL0048	2X3W	6.4V3.0Ah LiFePO4	460	yes	Autotest	300X260X250	10	7