





LED EMERGENCY KITS

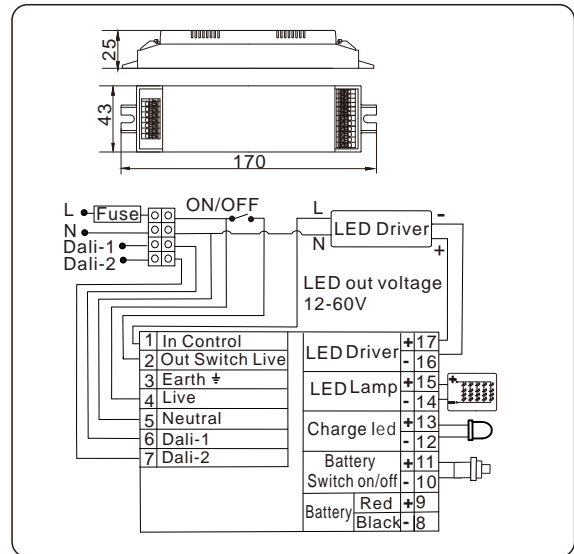

LC-F121260LED

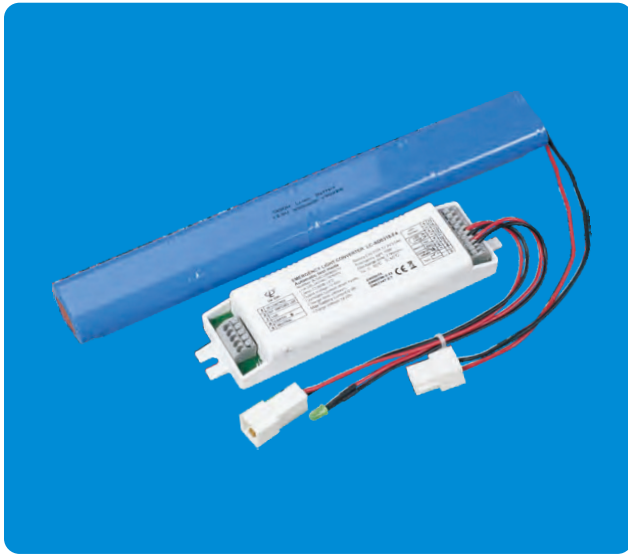

SPECIFICATION/DESCRIPTION:

LED Emergency Converter: non-maintained working mode, suitable for different lights, provide battery charge discharge. with DALI-2 control function or individual auto- test function, it works with external LED driver.

APPLICATION RANGE : downlight, tri-proof light, ceiling light, panel light...etc.

WORKING VOLTAGE:220-240VAC 50-60Hz **OUTPUT VOLTAGE:**12V1-5LEDs driver

DISCHARGE CURRENT:850mA **OUTPUT MODE:**Constant power output

AMBIENT TEMPERATURE TA:0...45°C **WARRANTY:**3Years

AUTO TEST FEATURES

Automatic commissioning
 Performs 20 second functional test every 30days
 Rated duration test every 52 weeks in accordance with EN 50172:2004
 The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.
 Indication through a bi-colour LED

STANDARD

EN 60598-1,EN 60598-2-22,EN60598-2-1,EN61347-1,EN61347-2-7,EN61347-2-13,EN62031,EN62471, EN61000-3-2,EN61000-3-3,EN55015,EN61547,IEC TR62778,IEC 62034,IEC 62386,

DALI-2 protocol: 101 102 202 104 251 252 253 254

DALI ID No:6391

Certificate:CE,EMC

LC-F121260LED Series

Type	Input	Output	Battery	Power	Function	Qty	Weight	Packing
21203030	220-240V	12-60V	LiFePO4 12.8V/3.0AH	11W	Autotest	25pcs	12Kgs	52X28X17CM
21203034	220-240V	12-60V	LiFePO4 9.6V/3.0AH	8.0W	Autotest	25pcs	10Kgs	42X22X17CM
22203030	220-240V	12-60V	LiFePO4 12.8V/3.0AH	11W	DALI-2	25pcs	12Kgs	52X28X17CM
22203034	220-240V	12-60V	LiFePO4 9.6V/3.0AH	8.0W	DALI-2	25pcs	10Kgs	42X22X17CM