

SPECIFICATION/DESCRIPTION:

LED Emergency Sign Light: maintained working mode, configured with driver, provide battery charge and discharge, with DALI-2 function or individual auto-test function

INPUT VOLTAGE:220-240AC 50/60Hz **EFFICACY:**130Lm/W(LED)

LUMINOUS BODY: 4MM light guide plate **LUMINANCE:**52 2cd/

PATTERN BOARD: 2.0mm PMMA (it can be replaced) **WARRANTY:**3Years

AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date

Indication through a bi-colour LED

STANDARD

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, EN 62034, IEC 62386

DALI No.6255, (LC-DZ001)

DALI-2 protocol: 101 102 202 104 250 251 252 253 254

Certificate:CB,CE,EMC



H02




H03

H04

H05

H06

H07

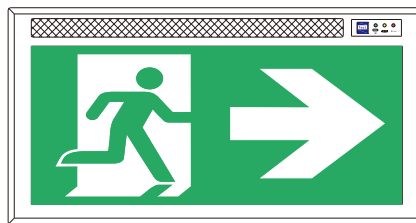

Standard electrical box

Recessed mounting

Surface mounting

Besteil-Nr	Type No	light	Battery	EMG	Display	Function	Packing	Qty	Weight
41301130	LCDJ-SL0013	1W	3.6V2.0Ah Ni-Mh	2W	Single	Autotest	550X290X210	20Pcs	18Kg
42301130	LCDJ-SL0013-D	1W	3.6V2.0Ah Ni-Mh	2W	Single	DALI-2	550X290X210	20Pcs	18Kg