


<b>SPECIFICATION/DESCRIPTION:</b> LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 function or individual auto-test function	
<b>INPUT VOLTAGE:</b> 220-240AC 50/60Hz	<b>EFFICACY:</b> 130Lm/W(LED)
<b>LUMINOUS BODY:</b> 4MM light guide plate	<b>LUMINANCE:</b> 52 2cd/
<b>PATTERN BOARD:</b> 2.0mm PMMA (it can be replaced)	<b>WARRANTY:</b> 3Years
<b>AUTO TEST FEATURES</b> Performs 20 second functional test every 30days Rated duration test every 52 weeks in accordance with EN 50172:2004 The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date Indication through a bi-colour LED	
<b>STANDARD</b> EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, EN 62034, IEC 62386 DALI No.6255, (LC-DZ001) DALI-2 protocol: 101 102 202 104 250 251 252 253 254 Certificate:CB,CE,EMC	





H02                      H03                      H04                      H05                      H06                      H07



Recessed mounting

Surface mounting

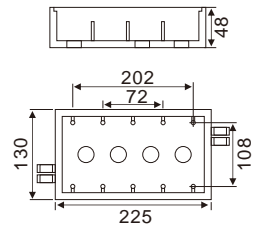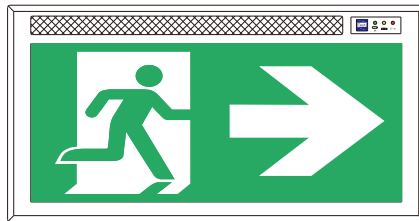

Standard electrical box

Besteil-Nr	Type No	light	Battery	EMY	Display	Function	Packing	Qty	Weight
41301140	LCDJ-SL0014	1W	3.6V2.0Ah Ni-Mh	2W	Single	Autotest	550X290X210	20psc	18Kg
42301140	LCDJ-SL0014-D	1W	3.6V2.0Ah Ni-Mh	2W	Single	DALI-2	550X290X210	20psc	18Kg