

SPECIFICATION/DESCRIPTION:

LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 function or individual auto-test function

INPUT VOLTAGE:220-240AC 50/60Hz

EFFICACY:130Lm/W(LED)

LUMINOUS BODY: 4MM light guide plate

LUMINANCE:52 2cd/

PATTERN BOARD: 1.5mm PMMA (it can be replaced)

WARRANTY:3Years

AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date


Indication through a bi-colour LED

STANDARD

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, EN 62034, IEC 62386

DALI No.6255(LC-ZD001), DALI-2 protocol: 101 102 202 104 250 251 252 253 254

Certificate:CB,CE,EMC

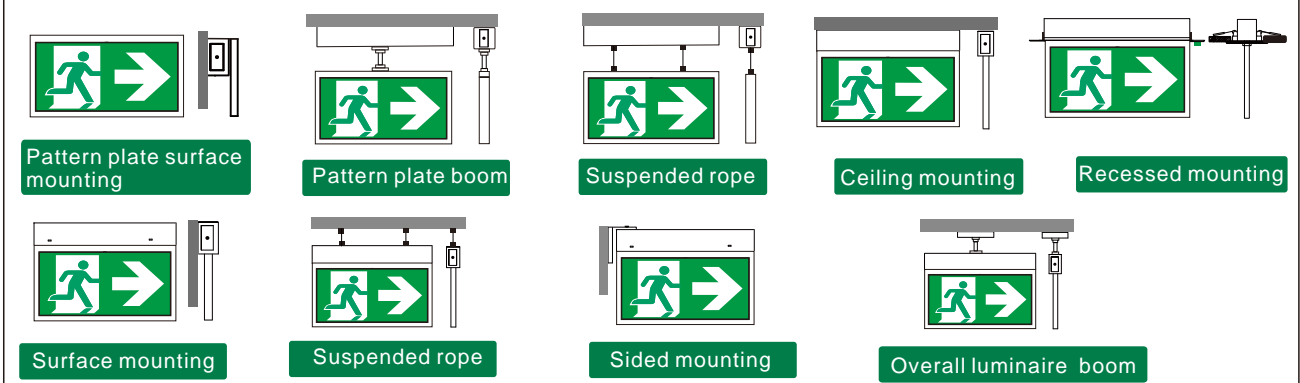

Besteil-Nr	Type No	light	Display	Battery	Duration	Function	Packing	Qty	Weight
41303180	LCDJ-SL0018	1W	Double/Single	3.6V1.2Ah Ni-Mh	3H	Autotest	360X360X310	20Pcs	16kg
42303180	LCDJ-SL0018-D	1W	Double/Single	3.6V1.2Ah Ni-Mh	3H	DALI-2	360X360X310	20Pcs	16kg