

**SPECIFICATION/DESCRIPTION:**

LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 function or individual auto-test function

**INPUT VOLTAGE:**220-240AC 50/60Hz

**EFFICACY:**130Lm/W(LED)

**LUMINOUS BODY:** 3MM light guide plate

**LUMINANCE:**55 2cd/

**PATTERN BOARD:** 1.0mm PMMA (it can be replaced)

**WARRANTY:**3Years

**AUTO TEST FEATURES**

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED

**STANDARD**

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, EN 62034, IEC 62386

DALI-2 No.6255 (LC-ZD001),

DALI-2 protocol: 101 102 202 104 250 251 252 253 254


Certificate:CB,CE,EMC

**INSTALLATION:**

Using 86 type switch box and cooperative with the installation of emergency electrical box(available in round and square), beautiful and convenient.

The pattern indicator board is use slot plug-in emergency electrical box base.

According to user's needs, four kinds of indicator board can be replaced flexibly accordingly.

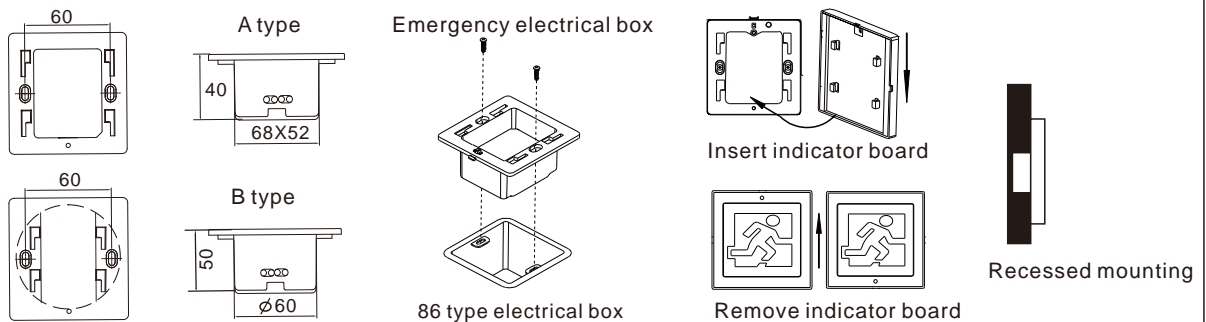

Besteil-Nr	Type No	light	Battery	Display	Duration	Function	Packing	Qty	Weight
41303190	LCDJ-SL0019	0.5/1W	6.4v0.5Ah LiFePO4	Single	3.0H	Autotest	450X450X100	20Pcs	8Kg
42303190	LCDJ-SL0019-D	0.5/1W	6.4v0.5Ah LiFePO4	Single	3.0H	DALI-2	450X450X100	20Pcs	8Kg