

### SPECIFICATION/DESCRIPTION:

LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 function or individual auto-test function

**INPUT VOLTAGE:**220-240AC 50/60Hz

**EFFICACY:**130Lm/W(LED)

**LUMINOUS BODY:** 6MM light guide plate

**LUMINANCE:**40 cd/m<sup>2</sup>

**PATTERN BOARD:** 1.5mm PMMA

**WARRANTY:**3Years

### AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date

Indication through a bi-colour LED



### STANDARD

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, EN 62034, IEC 62386

DALI No.6255, (LC-ZD001)

DALI-2 protocol: 101 102 202 104 250 251 252 253 254

Certificate:CE,EMC

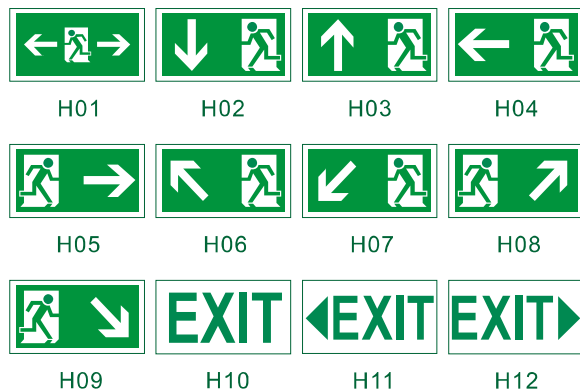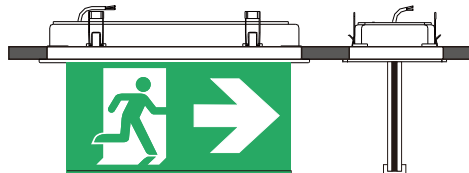

Besteil-Nr	Type No	light/EMY	Battery	Display	Duration	Function	Packing LxWxH	Qty Pcs	Weight Kg
41303270	LCDJ-SL0027	1W/3W	6.4V1.5Ah LiFePO4	Double	3H	Autotest	475X385X275	4	7
42303270	LCDJ-SL0027-D	1W/3W	6.4V1.5Ah LiFePO4	Double	3H	DALI-2	475X385X275	4	7
41300270	LCDJ-SL0027	1W/3W	3.6V3.0Ah Ni-Cad	Double	3H	Autotest	475X385X275	4	7
42300270	LCDJ-SL0027-D	1W/3W	3.6V3.0Ah Ni-Cad	Double	3H	DALI-2	475X385X275	4	7