

**SPECIFICATION/DESCRIPTION:**

LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 function or individual auto-test function

**INPUT VOLTAGE:**220-240AC 50/60Hz

**EFFICACY:**130Lm/W(LED)

**LUMINOUS BODY:** 3MM light guide plate

**LUMINANCE:**52 2cd/

**PATTERN BOARD:** 2.mm PMMA (it can be replaced)

**WARRANTY:**3Years

**AUTO TEST FEATURES**

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date

Indication through a bi-colour LED


**STANDARD**

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, EN 62034, IEC 62386

DALI No.6255,(LC-ZD001)

DALI-2 protocol: 101 102 202 104 250 251 252 253 254


Certificate:CE,EMC



↓ Insert and install luminaires



↑ Pull out and remove luminaires

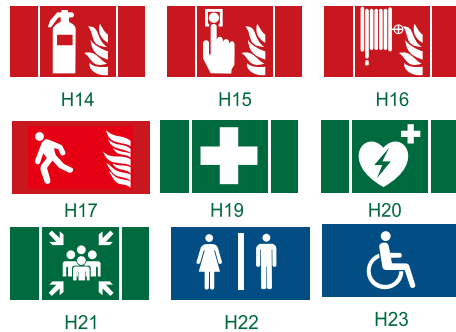

Besteil-Nr	Type No	light	Ground EMG	Battery	Display	Duration	Function	Packing	Qty Pcs	Weight Kg
41301290	LCDJ-SL0029A	1.0W	3W	7.2V2.0Ah Ni-Mh	Double	3H	Autotest	420X380X360	8	10
42301290	LCDJ-SL0029AD	1.0W	3W	7.2V2.0Ah Ni-Mh	Double	3H	DALI-2	420X380X360	8	10
41303290	LCDJ-SL0029B	1.0W	—	3.6V1.2Ah Ni-Mh	Double	3H	Autotest	420X380X360	8	10
42303290	LCDJ-SL0029BD	1.0W	—	3.6V1.2Ah Ni-Mh	Double	3H	DALI-2	420X380X360	8	10
41303291	LCDJ-SL0029C	1.0W	4W	6.4V3.0Ah Life po4	Double	3H	Autotest	420X380X360	8	10
42303291	LCDJ-SL0029CD	1.0W	4W	6.4V3.0Ah Life po4	Double	3H	DALI-2	420X380X360	8	10