
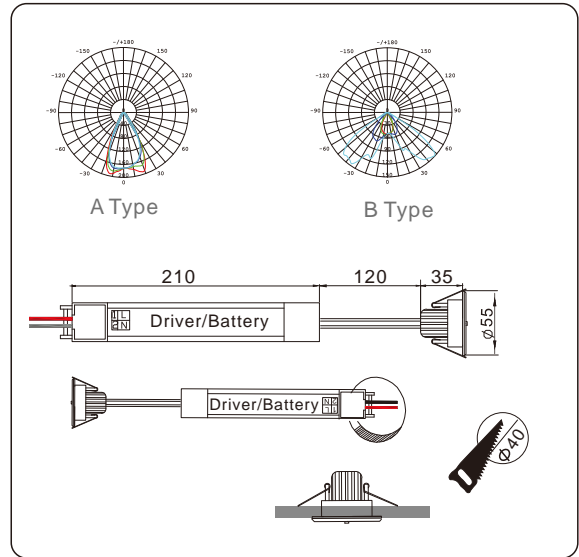


LCDJ-J0032

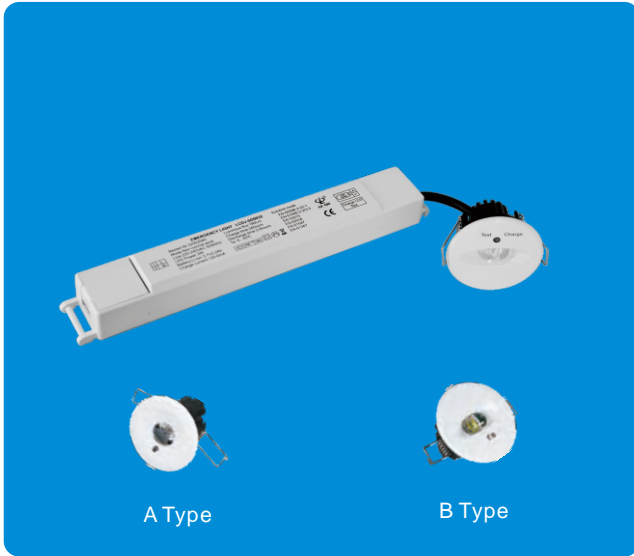

### SPECIFICATION/DESCRIPTION:

LED Emergency Light : non-maintained working mode, provide battery charging and discharge.

**WORKING VOLTAGE:**220-240VAC 50-60Hz

**INSTALLATION :**Recessed mounting

**LENS:** A/B two type lens can be replaced

**OUTPUT VOLTAGE:**3V

**DISCHARGE CURRENT:**650mA

**OUTPUT MODE:** Constant power

**EMERGENCY POWER:**2W

**LED CCT:**6000K

**AMBIENT TEMPERATURE TA:** 0...45°C

**WARRANTY:**3Years

### PROTECTION FUNCTION:

Dual management system for battery  
 Deep discharge protection  
 Short-circuit-proof battery connection  
 Polarity reversal protection for battery  
 Fault indication

### STANDARD

EN 60598-1, EN 60598-2-22, EN 61347-2-7, EN 61000-2-3, EN 61000-3-3, EN 55015, EN 61547, IEC TR 62778, Certificate: CE

## LCDJ-J0032

Besteil-Nr	Type No	Power	Battery	LM	Function	Packing	Qty	Weight
							Pcs	Kg
31403010	LCDJ-J0032-A	3W	3.7V2.2Ah Li-ion	210	No	515X400X350	10	14
31403011	LCDJ-J0032-B	3W	3.7V2.2Ah Li-ion	210	No	515X400X350	10	14