




LED EMERGENCY LIGHT



LCDJ-SD0032

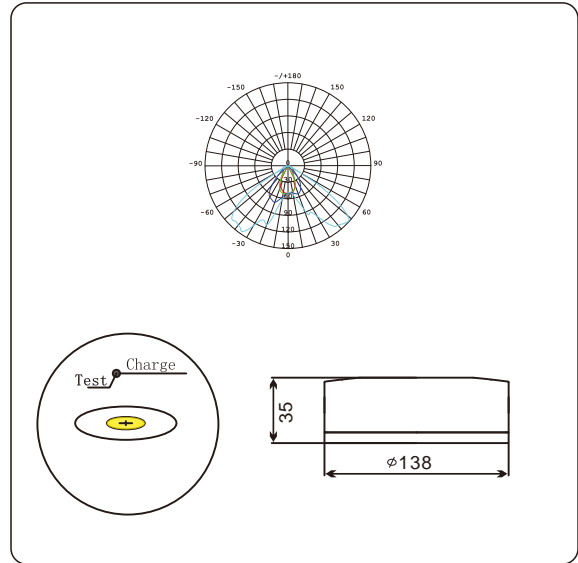

SPECIFICATION/DESCRIPTION:

LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function

WORKING VOLTAGE:220-240VAC 50-60Hz

INSTALLATION :Surface mounting

LENS: Narrow light, lens can't be replaced

OUTPUT VOLTAGE:3V

DISCHARGE CURRENT:550mA

OUTPUT MODE: Constant power

EMERGENCY POWER:2W

LED CCT:6000K

AMBIENT TEMPERATURE TA: 0...45°C

WARRANTY:3Years

AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED

STANDARD

EN 60598-1, EN 60598-2-22, EN61347-2-7, EN61000-2-3, EN61000-3-3, EN55015, EN61547, IEC TR62778, IEC 62034, IEC 62386

DALI-2 protocol: 101 102 202 104 251 252 253 254

DALI-2 No:6292 (LC-ND001)

Certificate:CB,CE,EMC

LCDJ-SD0032 Series

Besteil-Nr	Type No	Power	Battery	Emergency LM	Function	Packing LxWxH	Qty Pcs	Weight Kg
31503120	LCDJ-SD0032	3W	6.4V1.5Ah LiFePO4	220	Autotest	300X300X280	20	8.5
32503120	LCDJ-SD0032-D	3W	6.4V1.5Ah LiFePO4	220	DALI-2	300X300X280	20	8.5
31503121	LCDJ-SD0032	3W	3.6V2.0Ah Ni-Mh	160	Autotest	300X300X280	20	8.5
32503121	LCDJ-SD0032-D	3W	3.6V2.0Ah Ni-Mh	160	DALI-2	300X300X280	20	8.5