

SPECIFICATION/DESCRIPTION:

LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 or individual auto-test function, surface mounting type

INPUT VOLTAGE:220-240AC 50/60Hz

EFFICACY:130Lm/W(LED)

LUMINOUS BODY: 4MM light guide plate

LUMINANCE:58 2cd/

PATTERN BOARD: 1.5mm PMMA (can be replaced)

WARRANTY:3Years

AUTO TEST FEATURES

Performs 20 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date

Indication through a bi-colour LED


STANDARD

EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, EN 62034,IEC 62386

DALI No.6255,(LC-DZ001)

DALI-2 protocol: 101 102 202 104 250 251 252 253 254

Certificate:CB,CE,EMC

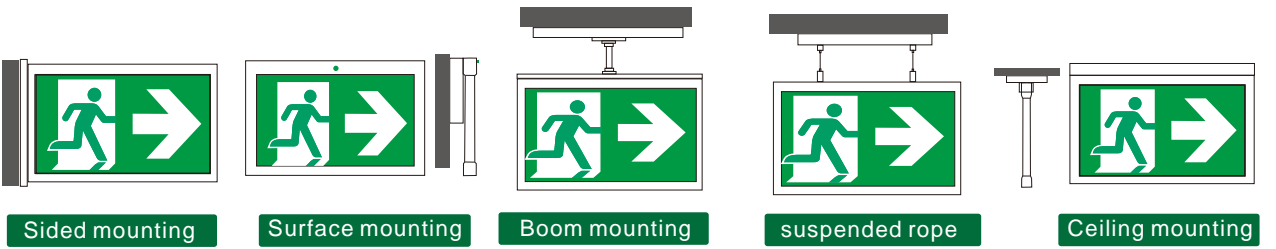

Besteil-Nr	Type No	Window	Display	Battery	Function	Packing	Qty	Weight
41301040	LCDJ-SL0004	1W	Single/Double	3.6V1.2Ah Ni-Mh	Autotest	600X360X190	20Pcs	9.5KG
42301040	LCDJ-SL0004-D	1W	Single/Double	3.6V1.2Ah Ni-Mh	DALI-2	600X360X190	20Pcs	9.5KG